



AIR BAG SYSTEM


5. Stack the tire with the passenger-side air bag module on top of two tires. Stack a tire on top of the three tires. Stack another tire that has a wheel on top of the four tires.

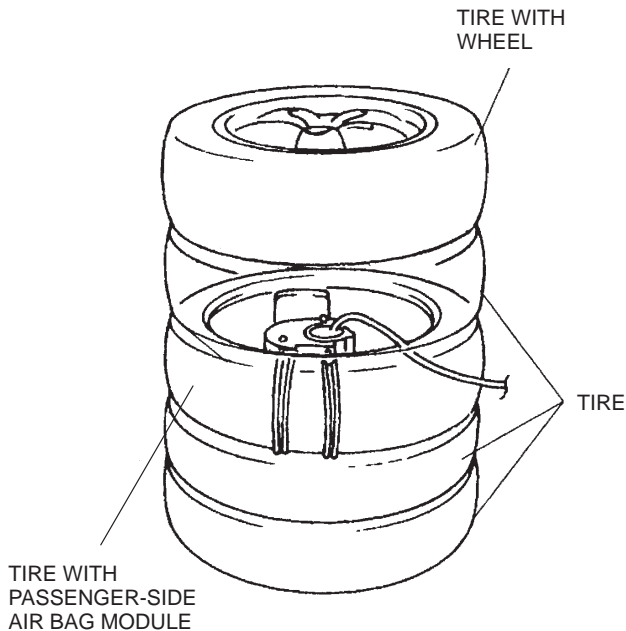


6. Tie all tires together with wire.



7. Connect the **SST** (Deployment Tool) to the **SST** (Adapter Harness).

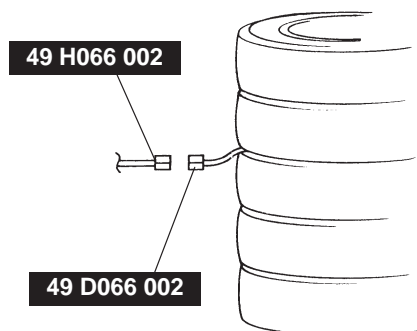

8. Connect the red clip of the **SST** (Deployment Tool) to the positive battery terminal and the black clip to the negative battery terminal.
9. Verify that the red light on the **SST** (Deployment Tool) is illuminated.

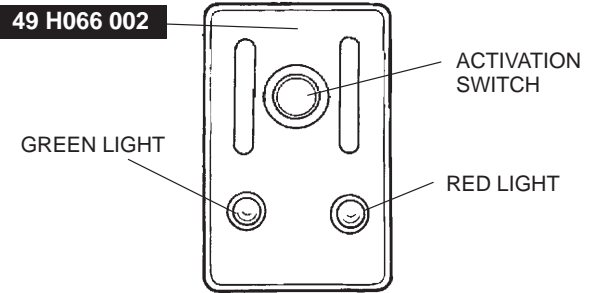

10. Make sure all persons are standing **at least 6 m {20 ft}** from the tire.
11. Press the activation switch on the **SST** (Deployment Tool) to deploy the passenger-side air bag module.

AIR BAG MODULE DISPOSAL PROCEDURE

Warning

- Before scrapping a vehicle with an undeployed air bag module, deploy the air bag module. The undeployed air bag module may deploy by accident causing injury. Never dispose of an undeployed air bag module.

Warning

- The air bag module is very hot immediately after it deploys. You can get burned. Do not touch the air bag module for at least 15 minutes after deployment.

Warning

- Pouring water on a deployed air bag module is dangerous. The water will mix with residual gases to form a gas that can make breathing difficult. Do not pour water on the deployed air bag module.

Warning

- A deployed air bag module may contain deposits of sodium hydroxide, a caustic byproduct of the gas-generated combustion. If this substance gets into your eyes or on your hands, it can cause irritation and itching. When handling the deployed air bag module, wear gloves and safety glasses.

1. Put on gloves and safety glasses.
2. Place the deployed air bag module in a plastic bag, seal it, and then dispose of it.
3. Wash your hands after removing your gloves.